


Modular Remote Isolation System (MRI)

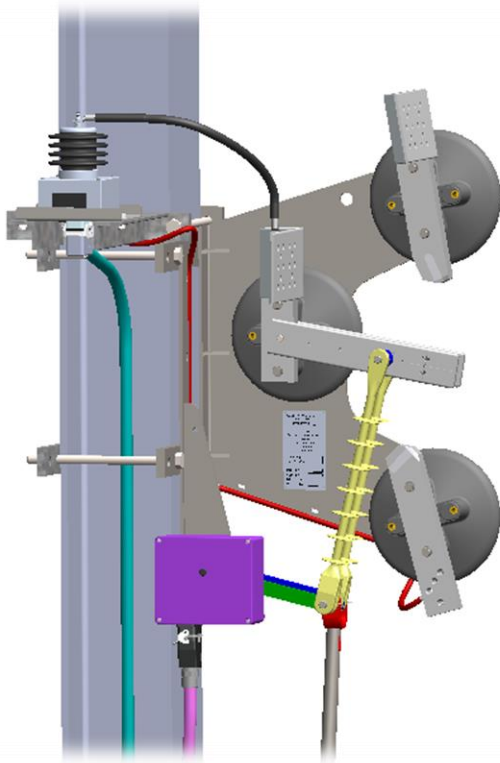

Advanced Features:

- Safe logical motorised operation.
- Variable Control Methods: Local control and/or remote control, and local manual operation.
- Time-efficient & fast response: allows for centralised commands and real-time monitored system functionalities
- Interlocking.
- Configurable to operational requirements.
- Suitable and field-upgradeable for current ART product range isolators.
- Proudly Australian designed and manufactured.

e: sales@ar-tech.com.au


p: +61 2 9482 5710

w: ar-tech.com.au

MRI 4140

Custom design

- Customised system design to meet site-dependent need.
- Configurable to meet network wide operational rules.
- Local interface control panels suited to site/depot.
- Designed for SCADA/RTU interface.
- Wide range of control input to choose from: 48VDC, 110V-250VDC, 100V-240VAC.
- Choice of Auxiliary Contacts/ Optical Encoder for Blade Position Indication.
- Choice of sensors - V sensor, V&I combined sensor and V&Neg continuity combined sensor to monitor the OHW electrical parameters.
- Actively progressing towards SIL certification.

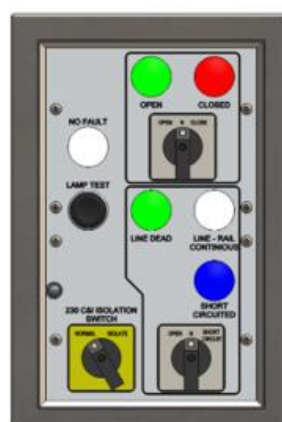

e: sales@ar-tech.com.au

p: +61 2 9482 5710

w: ar-tech.com.au

MRI 4140